




# MAXIFLEX PRO-X

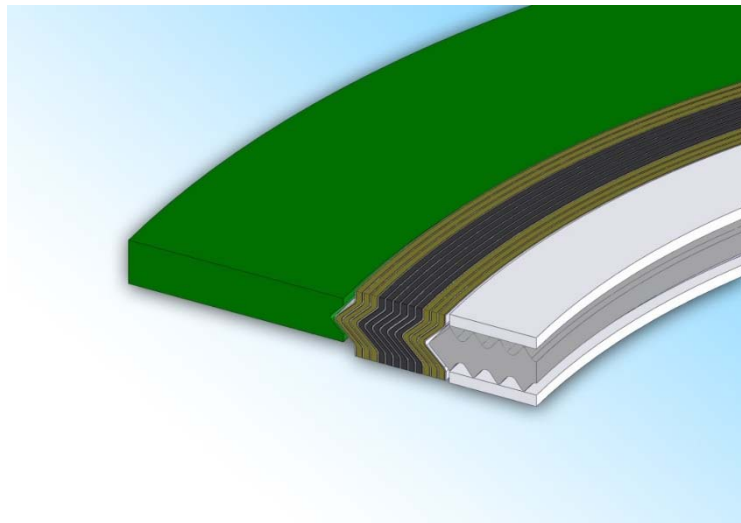

An addition to the Maxiflex PRO range designed for use in seawater applications where the graphite cannot be exposed to the media.

Maxiflex PRO-X incorporates a serrated PTFE faced inner ring which seals with very low load. This offers exceptional sealing performance at the gasket bore to reduce crevice corrosion at the inner ring.

The Mica filling on the inner and outer edges of the spiral stop the permeation to the graphite.

The incorporation of a Maxiprofile inner ring creates a gasket with two sealing regions. The Maxiprofile acts as a compression stop needed for high integrity gaskets and also enables a seal to be created

Maxiflex PRO-X is designed for use in seawater applications and as standard they are manufactured as follows:

**Outer guide ring:** Carbon steel with corrosion resistant coating

**Sealing element:** 316L with mica / graphite / mica

**Inner seal:** 316L/PTFE

(Other materials are available according to different service conditions)

## APPROVALS

- » Fire-safe to API-6FB

### HEAD OFFICE

KLINGER Ltd  
Wharfedale Road  
Euroway Trading Estate  
Bradford BD4 6SG

Tel: 01274 688 222  
Fax: 01274 688 549  
www.klinger.co.uk  
enquiries@klingeruk.co.uk



FM 602916 FM 10571 OHS 570166 EMS 570165

### KLINGER RUNCORN

Tel: 01928 577 030  
Fax: 01928 575 233

### KLINGER SOUTHAMPTON

Tel: 02380 611 855  
Fax: 02380 610 360

### KLINGER ABERDEEN

Tel: 01224 772 962  
Fax: 01224 772 953

### KLINGER IMMINGHAM

Tel: 01469 575 289  
Fax: 08449 676 779

### KLINGER MIDDLESBROUGH

Tel: 01642 220 289  
Fax: 01642 220 290

### KLINGER GRANGEMOUTH

Tel: 01324 472 231  
Fax: 01324 482 111