




MAXIFLEX PRO

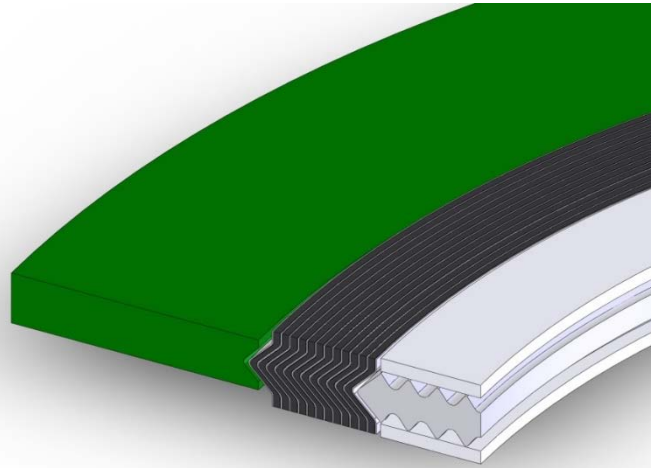

A high-integrity, dual-seal gasket specially designed for service in high-criticality, corrosive applications where sealing performance is of paramount importance.

The inner ring of a standard Maxiflex can allow media to accumulate which could promote corrosion. Maxiflex PRO prevents this; the conformable facing material enables the gasket seal at the flange bore eliminating media build-up.

The incorporation of a Maxiprofile inner ring creates a gasket with two sealing regions. The Maxiprofile acts as a compression stop needed for high integrity gaskets and also enables a seal to be created.

The Klinger Maxiflex PRO gasket is designed for use in highly aggressive chemical applications such as hydrofluoric acid.

Fire-safe according to API 6FB.

For use in HF applications and as standard they are manufactured as follows:

- Outer guide ring:** Carbon steel with HF detection paint
- Sealing element:** Monel 400/Graphite
- Inner seal:** Monel 400/PTFE

(Other materials are available according to different service conditions)

HEAD OFFICE

KLINGER Ltd
Wharfedale Road
Euroway Trading Estate
Bradford BD4 6SG

Tel: 01274 688 222
Fax: 01274 688 549
www.klinger.co.uk
enquiries@klingeruk.co.uk



FM 602916 FM 10571 OHS 570166 EMS 570165

KLINGER RUNCORN

Tel: 01928 577 030
Fax: 01928 575 233

KLINGER SOUTHAMPTON

Tel: 02380 611 855
Fax: 02380 610 360

KLINGER ABERDEEN

Tel: 01224 772 962
Fax: 01224 772 953

KLINGER IMMINGHAM

Tel: 01469 575 289
Fax: 08449 676 779

KLINGER MIDDLESBROUGH

Tel: 01642 220 289
Fax: 01642 220 290

KLINGER GRANGEMOUTH

Tel: 01324 472 231
Fax: 01324 482 111